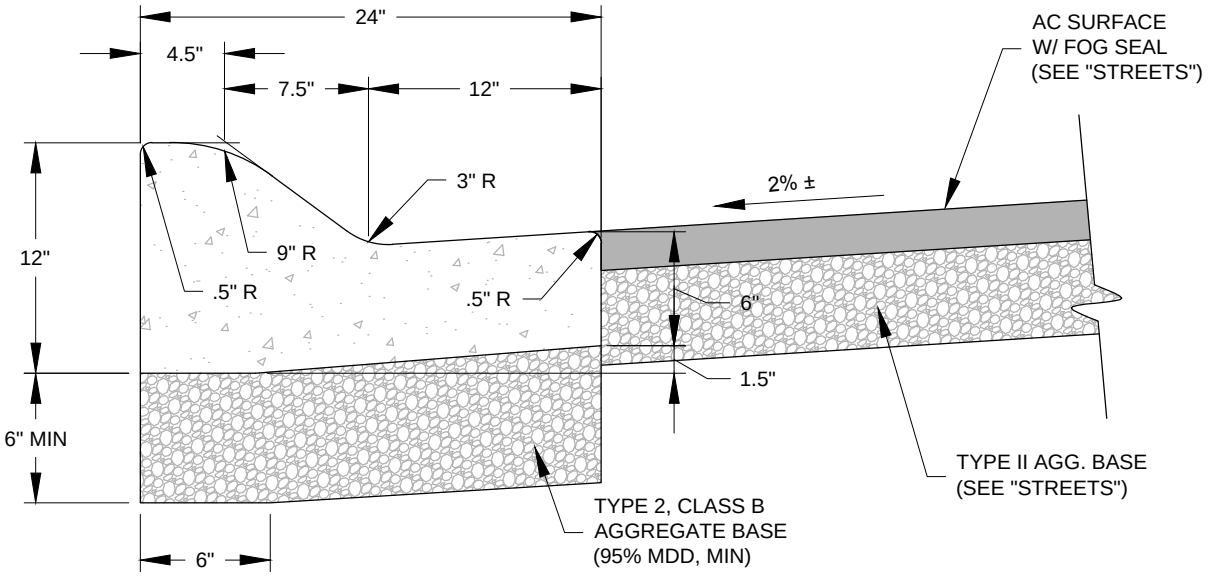


**TYPE 1 ROLLED**
**CURB & GUTTER**

## NOTES:

1. CONCRETE SHALL MEET THE REQUIREMENTS OF SECTION 6 OF THE CITY OF FERNLEY GENERAL NOTES AND SECTION 337.10 OF THE LATEST EDITION OF THE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION.
2. AGGREGATE BASE MATERIAL SHALL MEET THE REQUIREMENTS OF SECTIONS 302 & 308 OF THE LATEST EDITION OF THE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION.
3. ALL CONCRETE CURB AND GUTTER SHALL HAVE $\frac{1}{2}$" EXPANSION JOINTS EVERY 90 FEET AND AT ALL CURB RETURNS. WEAKENED PLANE JOINTS SHALL BE EVERY 5 FEET.
4. PLANT MIX BITUMINOUS SURFACE SHALL BE $\frac{1}{4}$" TO $\frac{1}{2}$" ABOVE LIP OF GUTTER PAN.

# *TYPE I ROLLED C & G*

*Detail No.*

**164**

*STREETS*

| DATE | REVISIONS | BY |
|---|---|---|
| 8/4/15 | ADDED | |